
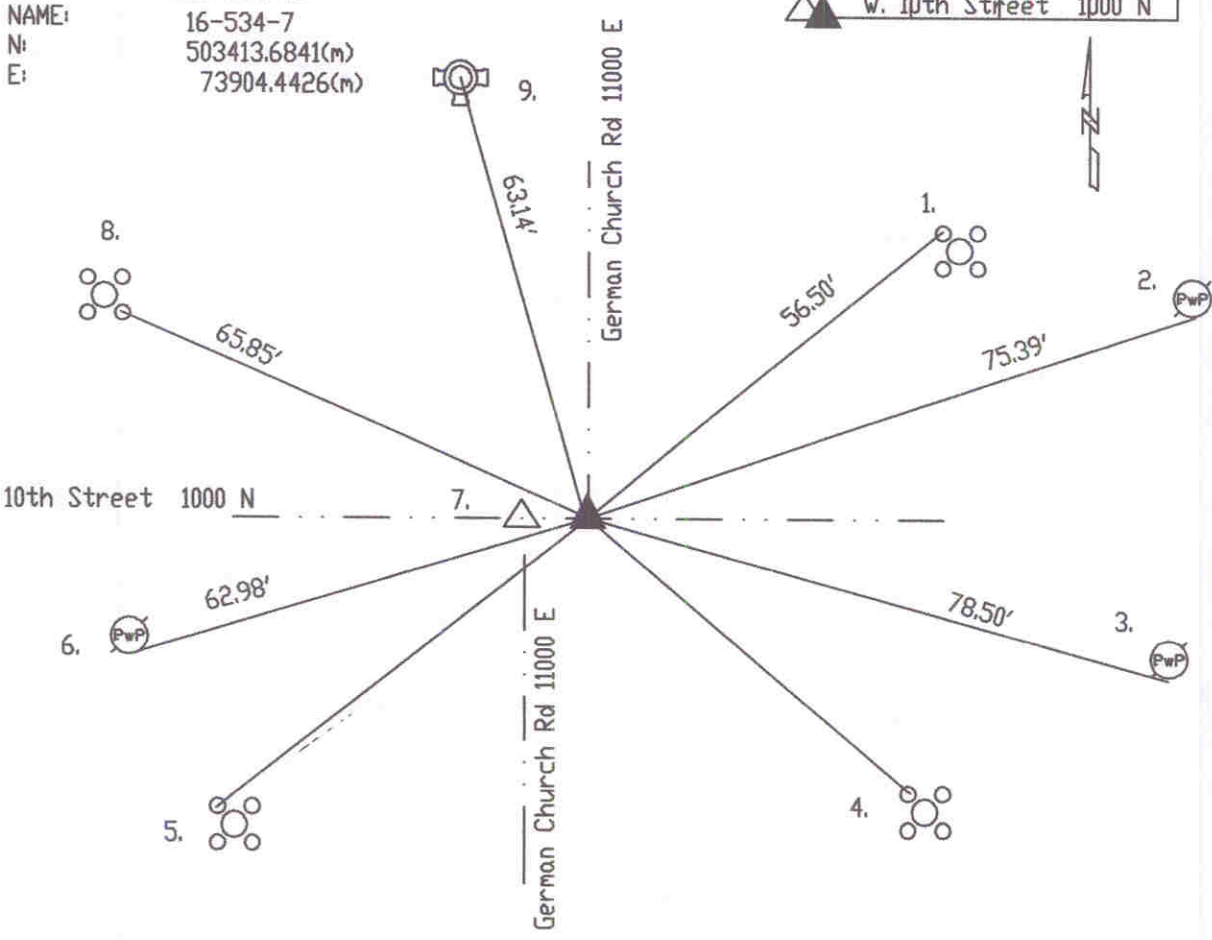


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 16 RANGE 5
DATE: -2-19-99-- 6-7-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 8-30-94
EDM ties

IN. S.P.C. E ZONE, NAD 83
NAME: 16-534-7
N: 503413.6841(m)
E: 73904.4426(m)

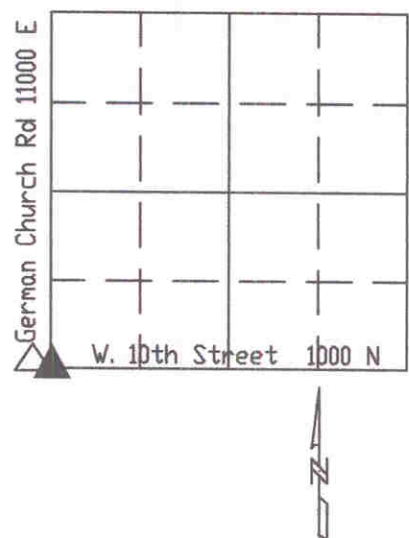

Original post set 1820 by Hendricks with witnesses: 27" beech S 2 W 8 links, 25" dogwood N 78 W 14 links per Marion County Atlas pg. 15. Hosbrook 1- 20&21- 1853 called no monument; but witnesses: 6" elm S 89 1/2 W 8 links, 14" beech S 57 E 14 1/2 links per Warren Township Legal Survey Book pg. 16. Excavated 8-30-94 by Wilcoxon MCS and brass plug was removed and a Harrison set in accordance with the 10th Street construction project. Re-tied 2-19-99 by Wilcoxon.

HC653407

REF.	DISTANCE	DESCRIPTION
1.	56.50'	Cut 'x' NE-bolt aluminum pole base
2.	75.39'	PK nail S Guide pole#14-521EA 18'up
3.	78.50'	PK nail S PwP#68-521EB 36'up
4.	49.47'	Cut 'x' NW-bolt aluminum pole base
5.	58.12'	Cut 'x' NW-bolt aluminum pole base
6.	62.98'	PK nail SE PwP# 12-521D 15'up
7.	10.17'	Due W to NW 3-15-5 (Harrison Marker)
8.	65.85'	Cut 'x' SE-bolt aluminum pole base
9.	63.14'	Top nut of fire hydrant